









## › FEATURES

- CFC free refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- Stainless steel framework construction
- Magnetic door gaskets can be replaced without any tools
- Doors have lock and key
- Easy to mount 4" casters (two lockable in front) are standard with all units
- Mono-block unit
- Top: 430 stainless steel
- Interior: 430 stainless steel with 304 stainless steel floor
- Exterior: Heavy duty, wear resistant black paint
- Temperature: 33 to 41°F / 0.5 to 5°C
- Electrical: 115/60/1 with NEMA 5-15P plug
- KBB48-2G-24 contains : 48 x 6 pks of 12 oz. cans or 216 12 oz. bottles
- KBB60-2G-24 contains : 72 x 6 pks of 12 oz. cans or 324 12 oz. bottles
- KBB72-3G-24 contains : 84 x 6 pks of 12 oz. cans or 378 12 oz. bottles

## › SPECIFICATIONS

MODEL	DOORS	EXT. DIMENSIONS W x D x H (in)	INT. DIMENSIONS W x D x H (in)	AMPS	H.P.	SHIP WEIGHT
KBB48-2G-24	2	49.1 x 24.4 x 41.7	36 x 20.01 x 29.37	4.5	3/8	307 lbs
KBB60-2G-24	2	61.1 x 24.4 x 41.7	47.99 x 20.01 x 29.37	4.5	3/8	358 lbs
KBB72-3G-24	3	73.1 x 24.4 x 41.7	60 x 20.01 x 29.37	6	1/2	417 lbs

CERTIFIED TO ANSI/NSF-7 STANDARDS

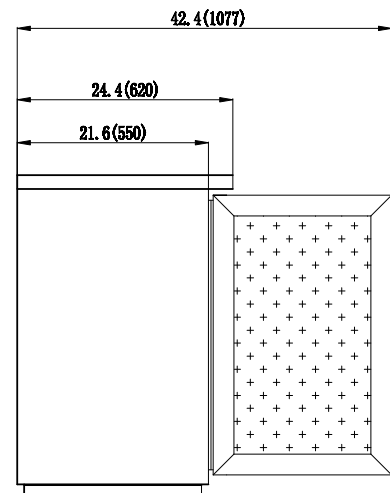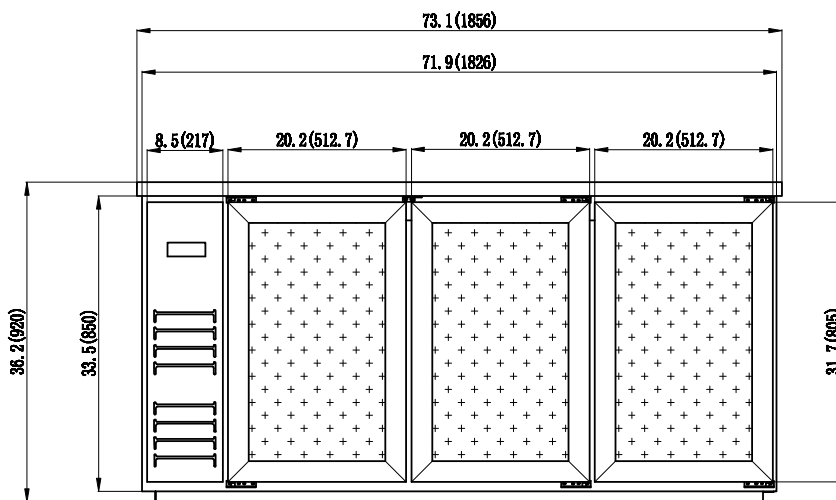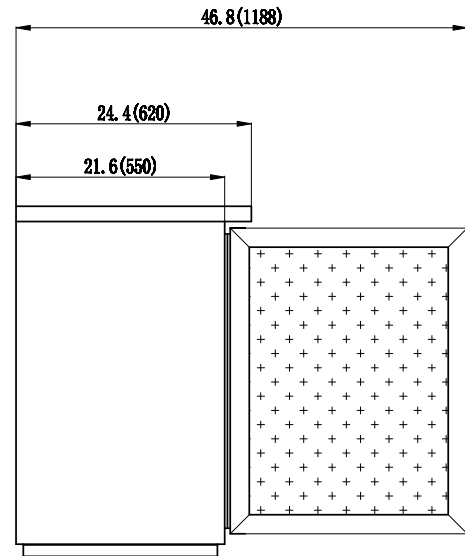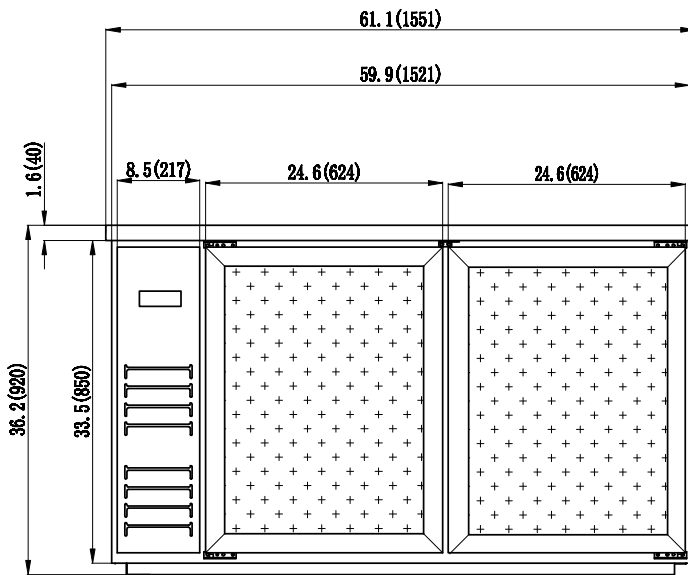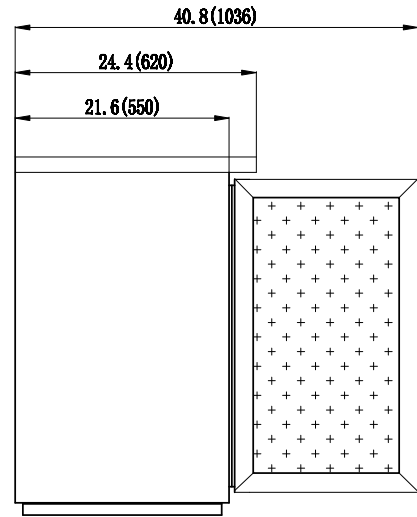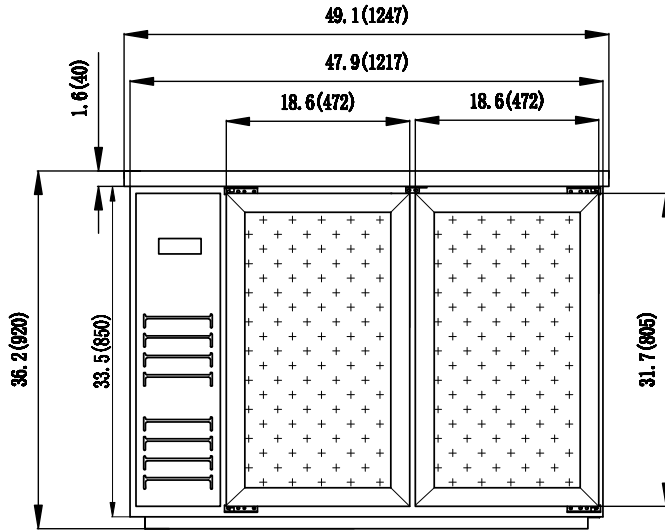

Dimensions in inches (mm)